





BM-SERIES

BM-D440

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 25 mm (1in)
Mounting Type	: Bolt-On
Nominal Impedance	: 8 ohm
D.C Resistance	: 6.3 ohm
Power Capacity	: 60 W Continuous Program
Sensitivity 1W/1M	: 106 dB With PH- 3220
Usable Frequency Range	: 1.5K~18K Hz
Recommended Crossover	: 2.2 Hz 12dB/oct
Voice Coil Diameter	: 44.4 mm (1.75 in)
Magnetic Assembly Weight	: 1.7 Kg (3.74 lb)
Flux Density	: 1.5 T
Magnet	: Strontium Ferrite
Diaphragm Material	: Titanium
Voice Coil Material	: Edge Wound Copper Clad Aluminium Ribbon
Voice Coil Former	: Resin Bonded Kapton

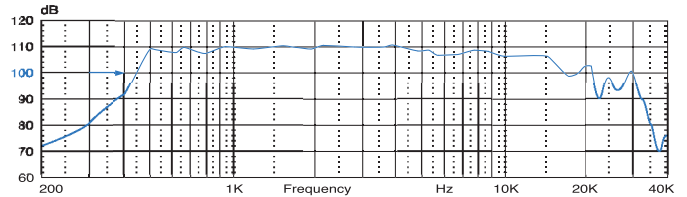

BM-D440S

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 25mm (1 in)
Mounting Type	: Screw-On
Nominal Impedance	: 8 ohm
D.C Resistance	: 6.3 ohm
Power Capacity	: 60 W Continuous Program
Sensitivity 1W/1M	: 106 dB With PH-3220
Usable Frequency Range	: 1.5K~18K Hz
Recommended Crossover	: 2.2 Hz 12dB/oct
Voice Coil Diameter	: 44.4 mm (1.75 in)
Magnetic Assembly Weight	: 1.76 Kg (3.872 lb)
Flux Density	: 1.5 T
Magnet	: Strontium Ferrite
Diaphragm Material	: Titanium
Voice Coil Material	: Edge Wound Copper Clad Aluminium Ribbon
Voice Coil Former	: Resin Bonded Kapton

