

CDX1-1425



- **25Wrms continuous power handling (AES standard) and 108dB sensitivity**
- **Lightweight and compact compression driver featuring neodymium magnet**
- **Finite Element Analysis (FEA) used to optimise both magnet and acoustic design**
- **Suitable for 2-way and 3-way systems**

General Specifications

Power rating (AES, W rms)	25
Nominal impedance (Ω)	8
Frequency range (Hz).....	2000-20000
Sensitivity (dB).....	108
Minimum crossover (Hz).....	2500
Voice coil diameter (mm/in).....	35.6/1.4
Diaphragm material.....	Aluminium
Magnet material.....	Neodymium



Mounting Information

Width (mm/in).....	90/3.5
Depth (mm/in).....	58/2.3
Weight (kg/lb).....	0.39/0.9
Fitting.....	Flange (2 M6 holes on 76mm, 3.0in PCD)
Throat exit (mm/in).....	25.4/1

Packed Dimensions & Weight

Single pack size W x D x H (mm/in).....	90 x 90 x 60
.....	/3.5 x 3.5 x 2.4
Single pack weight (kg/lb)	0.5/1.1
Multi pack (24) size W x D x H (mm/in)	250 x 350 x 290
.....	/9.8 x 13.8 x 11.4
Multi pack (24) weight (kg/lb)	10/22

Frequency Response and Impedance Curves

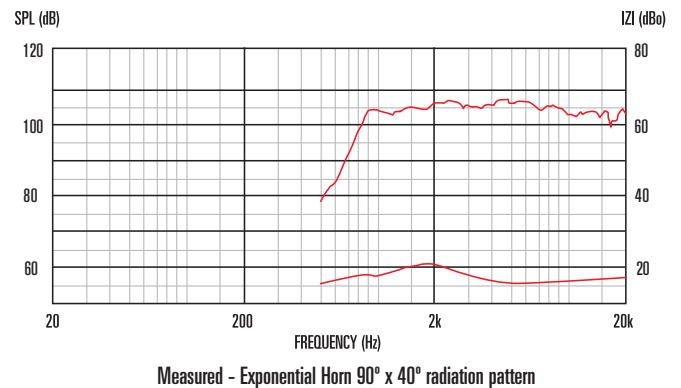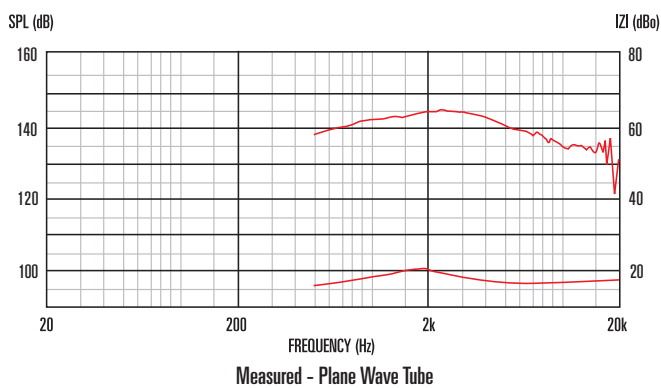

CELESTION

Professional Loudspeakers

Your Global Driver Solutions Partner